

White paper on NRA15 MMW radar



Hunan Nanoradar Science and Technology Co.,Ltd.

Version history

Date	Version	Version description
2017-11-14	1.0	The 1 st version of white paper on NRA15

Contents

White paper on NRA15 MMW radar.....	1
1 Application in UAV altimeter.....	1
1.1 Accurate weight of UAVs/Challenges in terrain following.....	1
1.2 Difference between mmw radar altimeter and traditional altimeter.....	1
2 Overview of NRA15 altimeter.....	2
2.1 Product features.....	2
2.2 Product specification.....	3
2.3 Product applications.....	4
3 Typical application example.....	4
3.1 Altimeter in plant protection UAVs.....	4
4 Conclusion.....	5

White paper on NRA15 MMW radar

Abstract: NRA15 is compact K-band radar altimeter developed by Hunan Nanoradar Science and Technology Co., Ltd. It adopts 24GHz-ISM frequency band, with the advantages of 4cm measuring accuracy, small size, high sensitivity, light weight, easy integration and stable performance, which satisfies the application requirements in unmanned flight platform (UAS), helicopters, small airships and other field. Its product performance has been recognized by many partners.

Keywords: NRA15, measuring accuracy, MMW radar, altimeter

1 Application in UAV altimeter

1.1 Accurate weight of UAVs/Challenges in terrain following

Complex terrain is a major obstacle to UAV flight. And the precise height and terrain tracking can ensure a stable flight and the successful fulfillment of mission. The altimeter can measure the distance between the UAV and the ground, and guide the UAV to stabilize the flight.

1.2 Difference between mmw radar altimeter and traditional altimeter

UAV altimeter is divided into absolute height measurement altimeter and relative height measurement altimeter. Specific classification is shown as in Table 1.

Table 1 Classification of UAV altimeters

Altimeter	principle	Product	Height	Accuracy	Advantages	Disadvantages
GPS+ barometer	GPS	In UAVs with altitude measurement	30000km over the ground	±0.5m	Mature application; Low cost	Relative large error; Not suitable for plant protection UAVs
Ultrasonic + light stream	TOF+ Vision	Most manufacturers	0.3~10m	±0.1m	High accuracy Low cost	Requiring abundant ground texture; Not suitable for plant protection UAVs
Ultrasonic	TOF	Jinci Tech	0.3~3m	±0.1m	Low cost	Easy to penetrate the vegetation; The accuracy would be reduced due to the vegetation; With big error and high cost
Laser	TOF	Laser range finder	<200m	±0.02m	With higher accuracy in good measuring environment	The vegetation has poor laser reflection effect
MMW radar	FMCW	Nanoradar NRA15	30m	±0.04m	High accuracy; Available at all weather and all day	Relative high cost

Absolute altitude measurement is the absolute height of the relative sea level, which is generally used for UAV flight platform in high altitude. Absolute altitude measurement mainly includes barometric altimeter and GPS altimeter. Relative measurement is the relative height of the UAV platform from the earth's surface, which is generally used for low-altitude unmanned aerial platforms, including ultrasonic altimeter, laser and millimeter-wave radar altimeter.

MMW radar altimeter is a new type of UAV altimeter. It is becoming popular among more and more UAV manufacturers, with its advantages of being robust, high precision, all-weather and all-day performance. While the short effect range and poor anti-interference ability of traditional mainstream ultrasonic altimeter, they are not suitable for the terrain with the coverage of vegetation.

Compared with other types of altimeter, millimeter-wave radar in the UAV altimeter has an irreplaceable advantage. It can help unmanned aerial vehicles in a variety of terrain conditions, especially plays a great role in the plant protection by unmanned aerial vehicle.

2 Overview of NRA15 altimeter

2.1 Product features

The NRA15 altimeter detects the reflection of the microwave by emitting a fan-shaped microwave downward to determines whether there is an obstacle below, and feedback the relative height of the obstacle to the radar, guiding the drone to fly at a stable height.

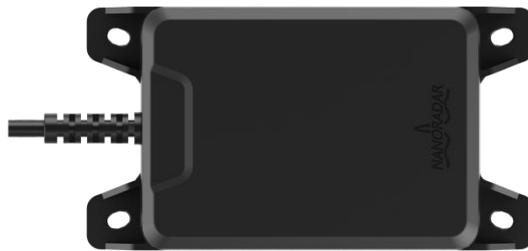


Figure 1 NRA15 physical map

With a highly integrated MMIC, very low power consumption (1.1W), a smaller size (100x57x16.5mm), a distance resolution of 4cm, a height measurement of 30m and lightweight design, NRA15 could meet the high-altitude occasions in plant protection UAVs and express transport aircraft which have high requirements of height-measurement and high environmental adaptability. NRA15 is currently mmw altimeter in mass production in China market. Its good performance is highly recognized by our partners.

To facilitate the development and test by customer, NRA15 radar provides UART communication interfaces. The default rate of UART interface with board-level communications is 115200bit / s, and the target refresh rate is 40Hz. With the universal external interface, it can quickly be integrated with the host computer or other MCU, to save the user's configuration

time.

2.2 Product specification

NRA15 adopts a highly complex FMCW modulation mode to accurately measure the distance to the ground or water surface within the measurement range.

Figure 2 NRA15 performance specifications

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
System performance					
Transmit frequency		24.00		24.20	GHz
Output power(EIRP)	Adjustable output		23		dBm
Modulation type		FMCW			
Update rate			40		Hz
Power consumption	@5V DC 25°C		1.1		W
Range-measuring performance					
Distance-measuring range	@0 dBsm	0.1		30	m
Ranging accuracy			±0.04		m
Multiple targets tracking characteristics					
Numbers of tracked targets simultaneously			1		个
Range resolution			0.75		m
Antenna features					
Beam width/TX	Azimuth(-6dB)		41		deg
	Elevation(-6dB)		37		deg
Beam width/RX	Azimuth(-6dB)		41		deg
	Elevation(-6dB)		37		deg
Side lobe level/TX	On the horizontal		-22		dB
	On the vertical		-23		dB
Side lobe level /RX	On the horizontal		-22		dB
	On the vertical		-23		dB
Other characteristics					
Supply voltage		5	12	20	V DC
Storage temperature		-60		125	°C
Operating temperature		-40		85	°C
Weight			81		g
Size		100×57×16.5 (LxWxH)			mm

The NRA15 adopts an advanced integrated planar microstrip array antenna with 1T1R, which includes 12 vertically polarized radiating elements of each transmitting and receiving antennas. Radar antenna in the azimuth and elevation are designed for narrow beam, with a beam width of about 41 in the azimuth (-6dB), and a beam width of about 37 in the pitch (-6dB). Both the transmitting and receiving antennas adopt Taylor algorithm to perform low side lobe synthesis on the antenna pattern. The low side-lobe design of the antenna makes the radar less susceptible to the interference of the ground clutter and the target outside the main beam, which can significantly improve the signal-to-noise ratio of the radar detection.

2.3 Product applications

- Safety range measurement and collision avoidance in UAVs

3 Typical application example

3.1 Altimeter in plant protection UAVs

Plant protection UAV can be remote controlled, to prevent spraying workers from exposure to pesticide, which could ensure the safety of spraying operations, and the efficient and fast operations save a lot of manpower and resources. Plant protection UAV is required to maintain a minimum fixed height of 1 ~ 2m from the crops, without restrictions on terrain and height. It could automatically set the height according to the terrain and avoid the obstacles automatically by adjusting the height. Moreover it has a high requirement if measurement accuracy (height error does not exceed $\pm 10\text{cm}$), to meet the pesticide spraying in the appropriate distance, to achieve uniform and efficient spray.

Traditional plant protection drones adopts ultrasonic as an altimeter. As the ultrasonic frequency is generally around 40 KHz ~ 45 KHz, it is easy to penetrate the vegetation, and it is close to the frequency of the surrounding environment, the ultrasonic altimeter is not suitable for deep forests, arable land and other vegetation covering terrain. Besides, the effect range of ultrasonic altimeter distance is generally less than 5m, therefore it is difficult to meet the actual terrain demand.

NRA15 is an altimeter specially designed for plant protection UAVs. With its flexible installation position, it is suitable for all types of UAV platforms. It can accurately sense the height of UAVs and vegetation, and transmit the UAV data to UAV flight control system through UART serial port, to achieve and maintain the flight in the appropriate altitude to vegetation, as shown below.



Figure 2 Application in plant protection UAV of NRA15

The advantages of NRA15 altimeter:

- 1) High precision;
- 2) Small size and low power consumption;
- 3) Strong anti-interference ability, easy for integration.

2 Conclusion

NRA15 mmw radar altimeter is the most high-performance product among the current altimeters in plant protection UAVs. In the complex terrain conditions with the coverage of vegetation, especially on grass or water surface, it could work continuously and stably, to achieve the uniform spraying of pesticides and other operations for plant protection UAVs. The product performance has been highly recognized and verified by a number of unmanned aerial vehicle manufacturers. Therefore it has been a standard configuration in plant protection unmanned aerial vehicles.

Hunan Nanoradar Science and Technology Co., Ltd. Tel.: 0731-88939916
No.27 Wenxuan Road, Hi-tech District Changsha E-Mail: sales@nanoradar.cn
B7 Lugu Compark URL: www.nanoradar.cn

